

CURVA

In acciaio ISO saldata

Art. 029.0620 3D - 90° (r=1,5d)


Art. 029.0622 3D - 180°

Esecuzione: ricavata da tubo saldato in acciaio ST 37.0 conforme alla norma EN 10253-1 - esecuzione e tolleranze secondo DIN 2605-1.


A richiesta: diametri superiori - esecuzione a 45° - con raggio di curvatura 5D - certificazione 2.2 e 3.1.



Art. 029.0620

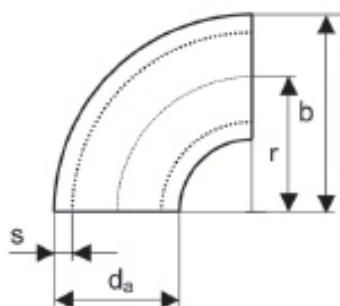

Art. 029.0620

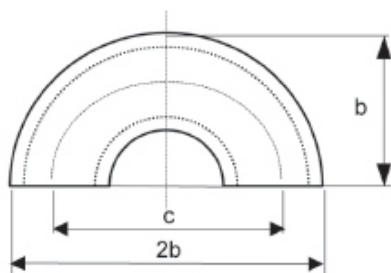

Art. 029.0622

Dimensioni

d_a	S mm	r mm	b mm	c mm	90° Kg	180° Kg
26.9	2.3	29	43	57	0.06	0.12
33.7	2.6	38	56	76	0.12	0.24
42.4	2.6	48	70	95	0.19	0.38
48.3	2.6	57	83	114	0.27	0.54
60.3	2.9	76	106	152	0.49	0.98
76.1	2.9	95	132	191	0.78	1.56
88.9	3.2	114	159	229	1.22	2.44
101.6	3.6	133	184	267	1.82	3.64
108	3.6	142.5	196	285	2.07	4.14
114.3	3.6	152	210	305	2.35	4.70
133	4.0	181	247	362	3.62	7.24
139.7	4.0	190	262	381	4.00	8.00
159	4.5	216	295	432	5.82	11.64
168.3	4.5	229	313	457	6.52	13.04
193.7	5.6	270	367	540	11.00	22.00
219.1	6.3	305	414	610	14.90	29.80
273	6.3	381	518	762	24.80	49.60
323.9	7.1	457	619	914	39.80	79.60
355.6	8.0	533	711	1067	57.50	115.00
406.4	8.8	610	813	1219	82.20	164.40
508	11.0	762	1016	1524	162.00	324.00
609.6	11.0	914	1219	1828	266.00	532.00